


CC 208c

System Components

Media Vessel (Qty.) Size(2) 8" x 17"
 Media Vessel Construction Fiberglass Wrapped Engineered Plastic
 Empty Bed Volume..... 0.40 ft³
 Media Type..... Standard Mesh Resin
 Media Volume 0.40 ft³
 Bed Depth Packed
 Free Board None
 Riser Tube..... 1" CPVC
 Distributor Upper..... 0.012" Slots, Engineered Plastic Basket
 Lower..... 0.009" Slots, Stainless Steel Flat Plate
 Under bedding..... None
 Regeneration Control Non-electric Use Meter
 Regeneration Type Countercurrent
 Meter Type 0.30 - 25.00 gpm Polypropylene Turbine



Inlet Water Quality


Pressure Range 15 – 125 psi Dynamic Pressure
 Temperature Range 35 – 160° F
 Temperature (Continuous)..... 150° F
 pH Range 5 – 10 SU
 Free Chlorine Cl₂ (Max.) 2.0 mg/L
 Hardness as CaCO₃ (Max.) 40 gpg

Operating Specs

Flow Range (15 / 30 psig)..... 10.2 – 15.0 gpm
 Flow Configuration..... Alternating
 Dimensions (Width x Depth x Height) 20" x 22" x 28"
 Weight (Operating / Shipping)..... 220 / 100 lbs.

Connections

Inlet / Outlet Connections Custom Adapter and Bracket
 Drain Connection..... 0.5" Tube
 Brine Line Connection 0.375" Tube (internal)
 Overflow Connection 0.5" Tube
 Power None

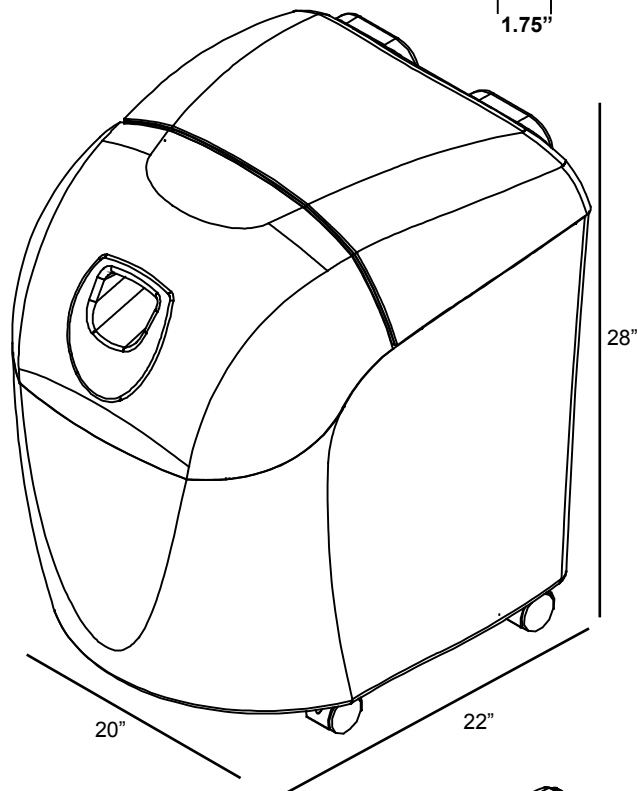

System Part Numbers

CC 208c, Compact Cabinet Softener, with Wheels11500A

Brine Tank Options

Tank Description..... CC 208 Cabinet
 Tank Height 28"
 Tank Footprint 20 x 22"
 Material HDPE
 Salt Capacity 100 lbs.

Regeneration Specifications

Regeneration Volume..... 14 gallons
 Regeneration Time 11 minutes
 Backwash Flow Control 1.40 gpm
 Brine Refill Flow Control 0.40 gpm

Setting	Capacity	Efficiency	Dosing	Meter Disc
1.0 lbs.	3,865 grains	3,865 gr./lb.	2.5 lbs./ft ³	
1.4 lbs.	5,326 grains	3,804 gr./lb.	3.5 lbs./ft ³	

**Gallons/Regeneration:
 Flow during regeneration (@ 15 psig):**

Disc Selection

(Compensated Hardness*)

1	2	3	4	5	6	7	8
4	9	14	19	23	27	30	35
5	11	17	22	27	32	35	40
732	366	244	183	146	122	105	92
10.2	10.2	10.2	10.2	10.2	8.3	6.7	5.5

*Compensated hardness in gpg = Hardness + (3 x Fe in mg/L)

Operating Profile

Softener shall remove hardness to less than 1/2 gpg when operated in accordance with the operating instructions. The system shall include two tanks. This duplex configuration shall operate with one tank on-line during service. During regeneration cycles, one tank shall provide water to service and to the regenerating tank. A water meter shall initiate system regeneration. The water meter shall measure the processed volume and be adjustable. Service flow shall be downflow and regeneration flow shall be upflow.

Regeneration Control Valve

The regeneration control valve shall be top mounted (top of media tank), and manufactured from non-corrosive materials. Control valve shall not weigh more than four pounds. Control valve shall provide service and regeneration control for two media tanks. Inlet and outlet ports shall accept a quick connect, double O-ring sealed adapter. Interconnection between tanks shall be made through the regeneration valve with a quick connect adapter. Control valve shall operate using a minimum inlet pressure of 15 psi. Pressure shall be used to drive all valve functions. No electric hook-up shall be required. Control valve shall incorporate four operational cycles including; service, brine draw, slow rinse, and a combined fast rinse and brine refill. Service cycle shall operate in a downflow direction. The brine cycle shall flow upflow, opposite the service flow, providing a countercurrent regeneration. Control valve shall contain a fixed orifice eductor nozzle and self-adjusting backwash flow control. The control valve will prevent the by-pass of hard water to service during the regeneration cycle.

Media Tanks

The tanks shall be designed for a maximum working pressure of 125 psi and hydrostatically tested at 300 psi. Tanks shall be made of engineered plastic with a 2.5 in. threaded top opening. Each tank shall be NSF approved. Upper distribution system shall be of a slot design. Lower distribution system shall be of a flat plate design. Distributors will provide even flow of regeneration water and the collection of processed water.

Conditioning Media

Each softener shall include standard mesh resin having a minimum exchange capacity of 30,000 grains/ft³ when regenerated with 15.0 lbs/ft³. The media shall be solid, of a proper particle size and shall contain no plates, shells, agglomerates or other shapes, which might interfere with the normal function of the water softener.

Brine System

A combination salt storage and brine production tank shall be manufactured of corrosion resistant, plastic. The brine tank shall have a chamber to house the brine valve assembly. The brine float assembly shall allow for adjustable salt settings and shall provide for a shutoff to the brine refill. The brine tank shall include a safety overflow connection to be plumbed to a suitable drain.